

INOX-micro cooled

from Ø 0.2 mm
to Ø 2.0 mm

Z2 - Sharp


2xD cutting length
5xD neck length

Integrated cooling channels
protect the tool from
overheating and flush away
all chips

The high-performance α -INOX coating
guarantees a long tool life and
prevents the cutting edges from
sticking

The reinforced shank in h5 quality
combined with an optimized working
length makes the tool robust and
vibration-free.

High feed and cutting speeds are made
possible by the use of
ultra-fine-grained solid carbide with
high fracture toughness.

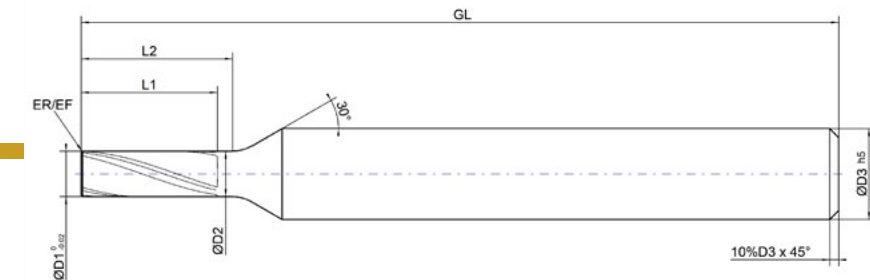

☐ Order

Order number: _____

☐ Inquiry

Dimensions:

D₁: _____ GL: _____ EF: _____

D₂: _____ L₁: _____ ER: _____

D₃: _____ L₂: _____ Z: _____

Coating:

☐ Coated*: _____

☐ Uncoated

Cooling channels:

☐ Yes ☐ No

Cutting direction:

☐ Left ☐ Right

Material to be machined:

Shank shape:

Quantity:

Date, signature & company stamp:

Contact person:

* Without further information, the most suitable coating will be used.