

INOX-torus cooled

from Ø 1.0 mm
to Ø 6.35 mm

from ER 0.15 mm
to ER 1.5 mm

3xD cutting edge length
5xD Neck length

Z4 - Torus mill (ER)



The high-performance α -INOX
coating guarantees a long tool
life and prevents the cutting
edges from sticking.

Integrated cooling channels pro-
tect the tool from overheating
and flush away all chips.

The reinforced shank in h5
quality combined with an
optimized effective length
makes the tool robust and
vibration-free.

High feed and cutting speeds are
made possible by the use of
ultra-fine grain solid carbide with
high fracture toughness.

ACTIONMILL®
by HB microtec
INOX-torus cooled

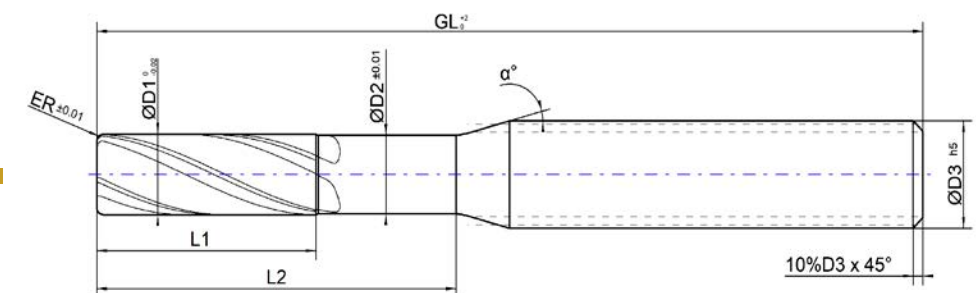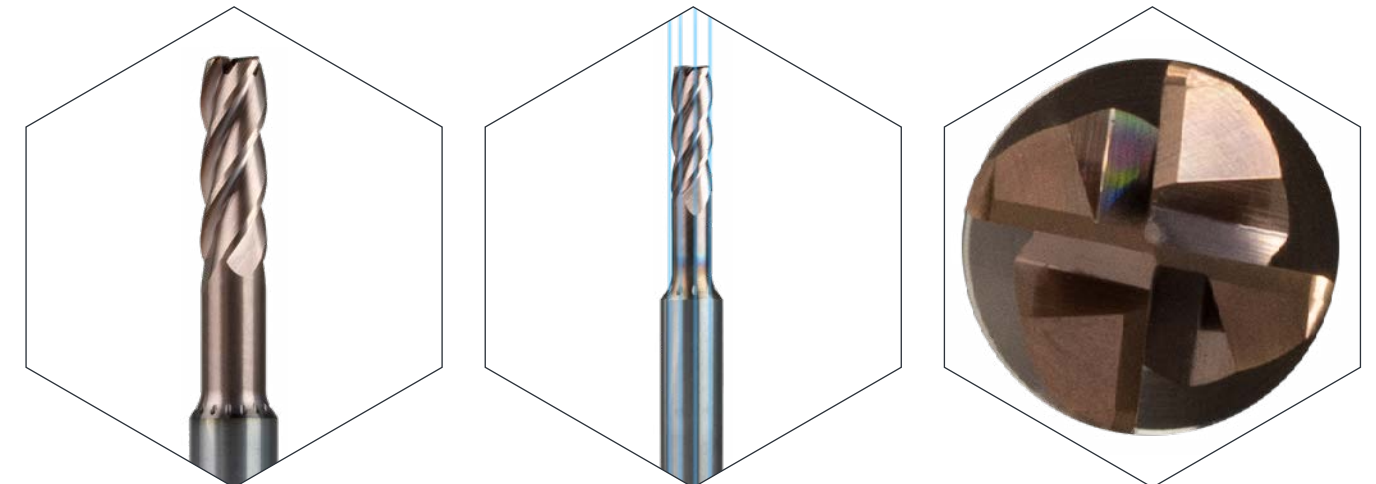

☐ Order

Order number: _____

☐ Inquiry

Dimensions:

D₁: _____ GL: _____ ER: _____
D₂: _____ L₁: _____ EF: _____
D₃: _____ L₂: _____ Z: _____

Coating:

☐ Coated*: _____
☐ Uncoated

Cooling channels:

☐ Yes ☐ No

Cutting direction:

☐ Left ☐ Right

Material to be machined:

Shank shape:

Quantity:

Date, signature & company stamp:

Contact person:

* Without further information, the most suitable coating will be used.