

170° α-INOX
high-performance point
geometry, 2x faster drilling
on inclined surfaces
compared to 180° flat
drills


from Ø 0.3 k6
to Ø 7.2 k6

The high-performance α-INOX
coating guarantees a long tool
life and prevents the cutting
edges from sticking

2xD drilling depth with 90°
countersink edge for chamfering

The reinforced h6 shank
combined with an optimized
usable length makes the tool
robust and vibration-free

High feed and cutting speeds
are made possible by the use
of ultra-fine-grained solid
carbide with high fracture
toughness.

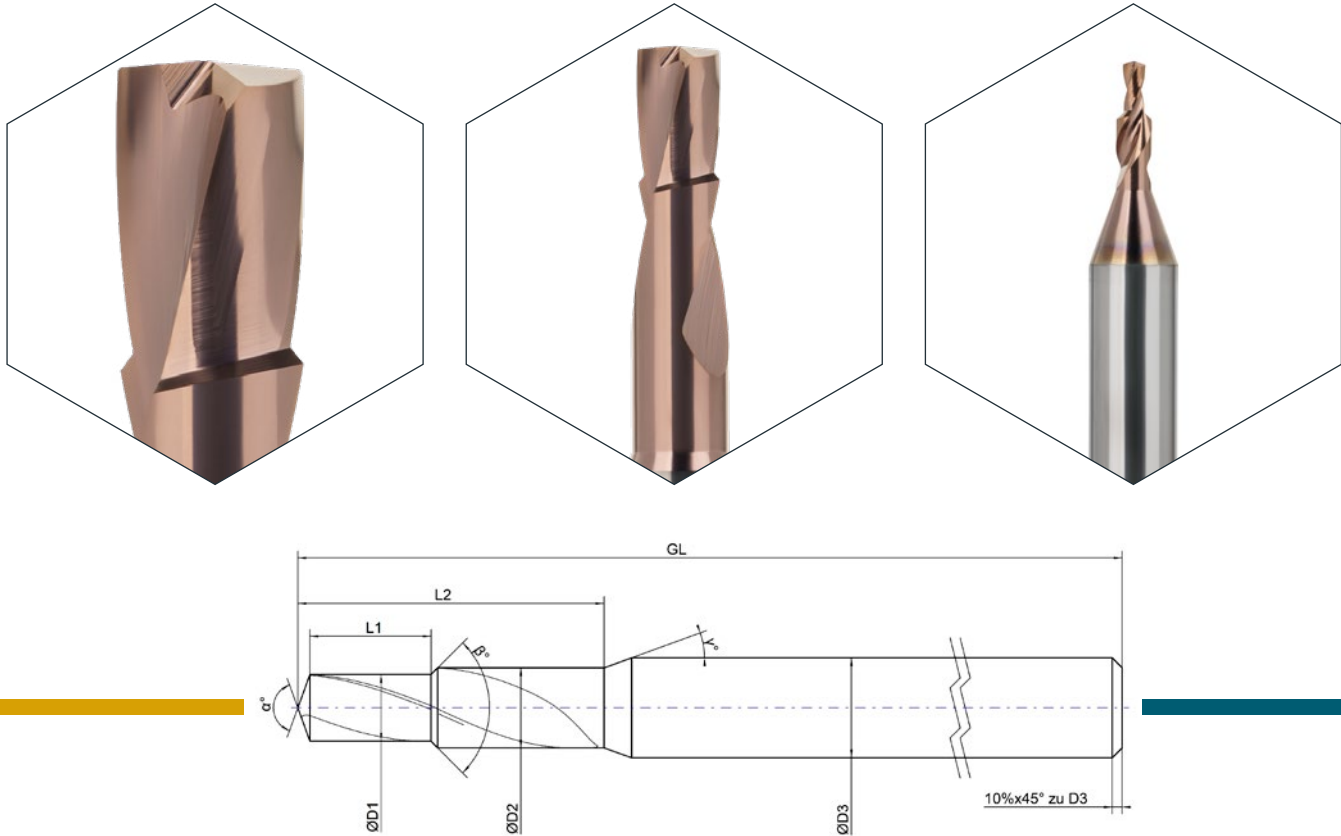

☐ Order

Order number: _____

☐ Inquiry

Dimensions: D₁: _____ GL: _____ α: _____ D₂: _____ L₁: _____ β: _____ D₃: _____ L₂: _____ γ: _____ Z: _____	Coating: ☐ Coated*: _____ ☐ Uncoated	Cooling channels: ☐ No ☐ Yes Cutting direction: ☐ Right ☐ Left
Material to be machined: _____	Shank shape: _____	Quantity: _____
Date, signature & company stamp: _____		Contact person: _____

* Without further information, the most suitable coating will be used.