

140° ^{+40°}/_{+2°} α-INOX
high-performance point geometry,
self-centering



3xD drilling depth with 90°
countersink for chamfering

Integrated cooling channels protect
the tool from overheating and flush
away all chips

The high-performance α-INOX
coating guarantees a long tool life
and prevents the cutting edges
from sticking

The reinforced shank in h5 quality
combined with an optimized working
length makes the tool robust and
vibration-free.

High feed and cutting speeds
are made possible by the use
of ultra-fine-grained solid
carbide with high fracture
toughness.

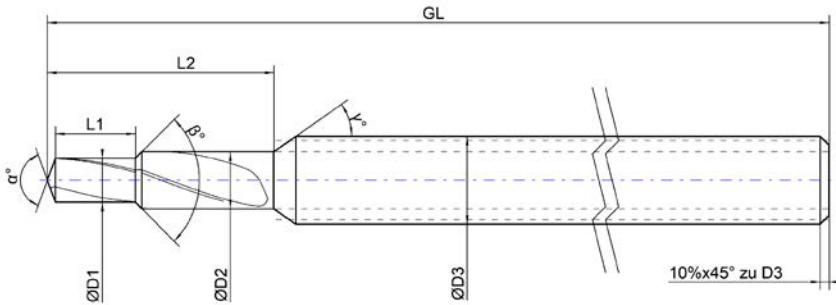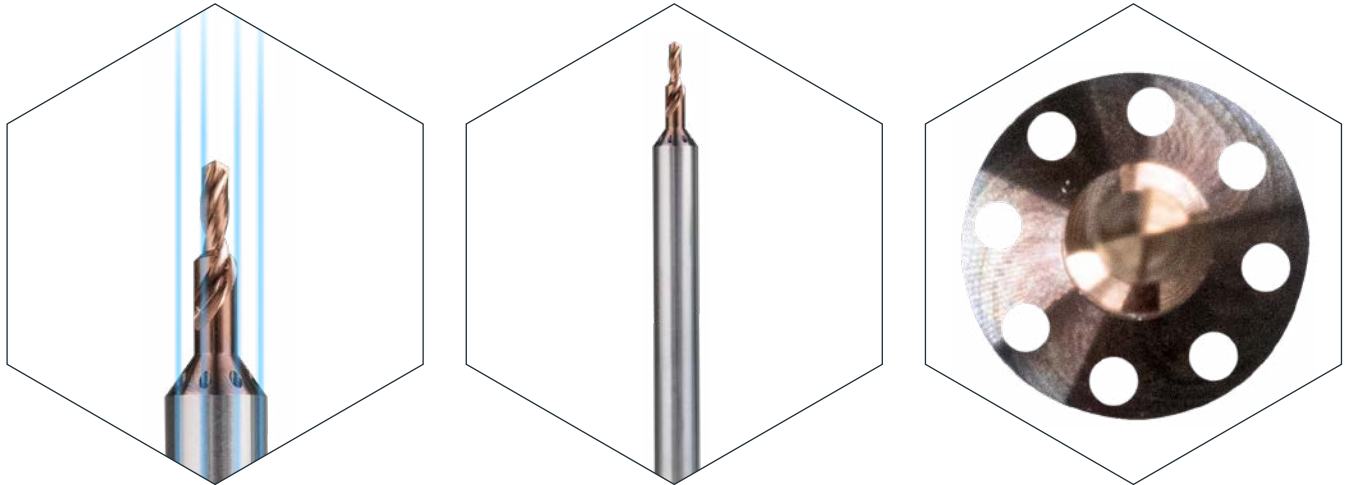

☐ Inquiry

☐ Order

Order number: _____

Other: _____

Dimensions: D ₁ : _____ GL: _____ α: _____ D ₂ : _____ L ₁ : _____ β: _____ D ₃ : _____ L ₂ : _____ γ: _____ Z: _____	Coating: ☐ Coated*: _____ ☐ Uncoated	Cooling channels: ☐ No ☐ Yes Cutting direction: ☐ Right ☐ Left
Material to be machined: _____	Shank shape: _____	Quantity: _____
Date, signature & company stamp: _____		Contact person: _____

* Without further information, the most suitable coating will be used.