

INOX quarter-circle mill



from $R\ 0.2 \pm 0.01\text{ mm}$
to $R\ 3.0 \pm 0.01\text{ mm}$

The high-performance α -INOX coating guarantees a long tool life and prevents the cutting edge from sticking.
■ 2 flutes

Sharply ground, positive geometries to prevent secondary burrs.

Reinforced h6 shank combined with an optimized usable length. Robust and vibration-free.

Thermal shock resistant, fine-grain carbide with high fracture toughness.

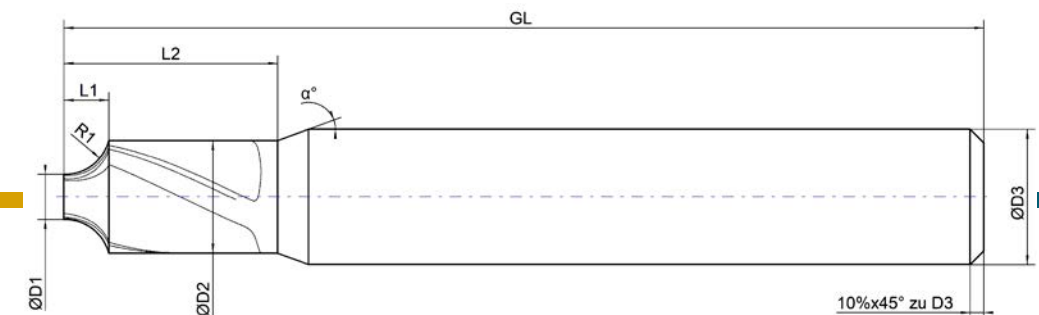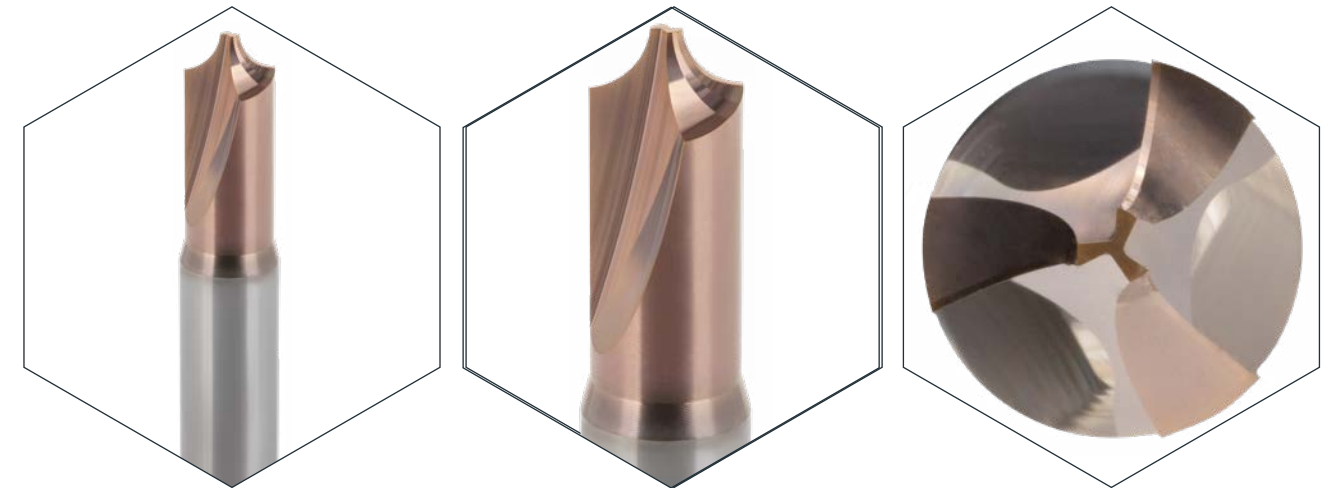

☐ Inquiry

☐ Order

Order number: _____

Other: _____

Dimensions:

D₁: _____ GL: _____ Z: _____
D₂: _____ L₁: _____ α : _____
D₃: _____ L₂: _____
R₁: _____

Coating:

☐ Coated*: _____
☐ Uncoated

Cooling channels:

☐ No ☐ Yes

Cutting direction:

☐ Right ☐ Left

Material to be machined:

Shank shape:

Quantity:

Date, signature & company stamp:

Contact person:

* Without further information, the most suitable coating will be used.