



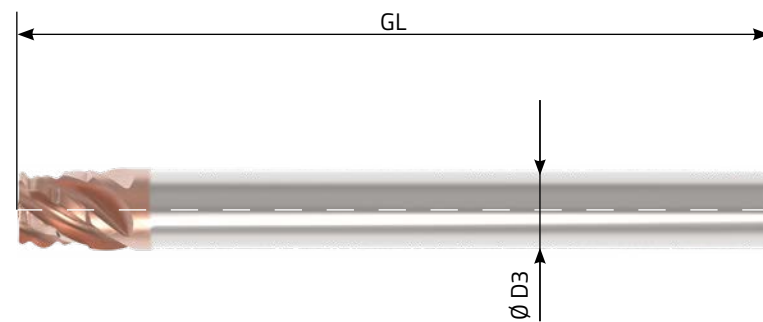

Article number XXX.YYY.AAA.BBB	"Torx®" type	D1 (mm)	D2 (mm)	D3 h6 (mm)	L1 (mm)	L2 (mm)	GL (mm)
AM.EX.T4.XXX.YYY.AAA.BBB.Z.BE.ZF.ZT	T4	Ø5.5 - 6.0	Ø5.0 - 5.4	Ø6 h6	1.0 - 1.5	3.0 - 5.0	76
AM.EX.T4.009.031.130.092.6.01.ZG.G	T4	6	5.4	Ø6 h6	1.5	4.0	76

Delivery time: Blank 2 weeks; Coated 3-4 weeks

Torx®	ØDA	ØDB	Rx	Ry
4	1.30	0.92	0.09	0.31
5	1.42	1.02	0.11	0.33
6	1.70	1.22	0.13	0.38
7	2.02	1.44	0.16	0.45
8	2.34	1.68	0.19	0.51
10	2.77	1.99	0.23	0.60
15	3.30	2.36	0.27	0.71
20	3.88	2.77	0.31	0.86
25	4.46	3.18	0.38	0.92
30	5.55	3.96	0.45	1.19

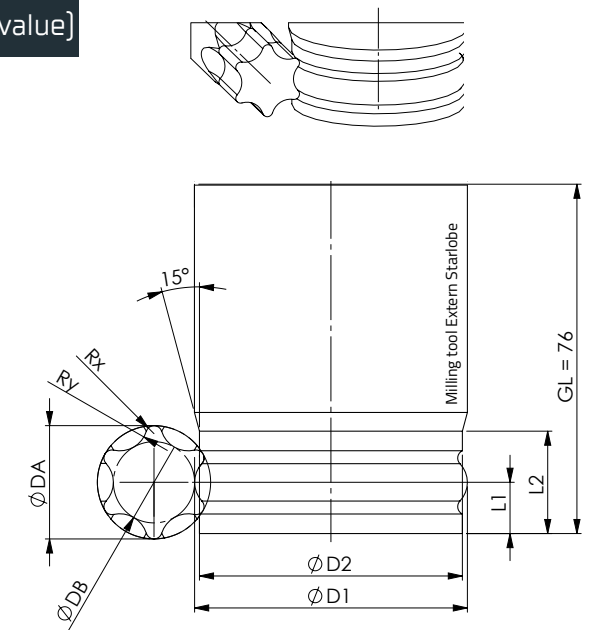

Other: _____

Dimensions (XXX,YYY,AAA,BBB): D₁ _____ D₂ _____ R_x (xxx) _____ D_A (AAA) _____ L₁ _____ R_y (yyy) _____ D_B (BBB) _____ L₂ _____ Z _____ Material to be machined _____	Coating: ☐ (.00) blank ☐ (.01) α-INOX ☐ (.02) β-Titan ☐ (.03) γ-Steel	Flute form ☐ (.ZG) Straight ☐ (.ZD) Helical
--	--	--

Product features					
	Material short code	Material number	Shank-∅ [mm]	Overall length [mm]	Amount of flutes [n]
☐	Torx® T4-T7	R_HB.060.760.h6	6	76	Z3 - Z6
☐	Torx® T8-T20	R_HB.080.800.h6	8	80	Z5 - Z8
☐	Torx® T25-T30	R_HB.100.900.h6	10	90	Z7 - Z10

Minimum order quantity from 5 pieces:

ØDA AAA	ØDB BBB	Rx XXX	Ry YYY	No. of flutes (Z)	Coating (BE)				Flute form (ZF)		Flute spacing (ZT)	
				Z3 – Z6	blank .00	α-INOX .01	β-Titan .02	γ-Steel .03	.ZG	.ZD	.G	.U
1.30	0.92	0.09	0.31	6	.01 (α-INOX)				.ZG (Z-Straight)		.G (even)	